

FROMM P359 Pneumatic Powered Plastic Strapping Tool

The FROMM P359 Pneumatic Powered Plastic Strapping Tool, is a reliable & simple tool ideally used for heavy duty applications. Boasting FROMM's superior tensioning force, the P359 has become a proven performer when strapping packages traditionally secured with 32mm steel.

The new P359 will change the way of packaging in the ferrous and non-ferrous industries, creating massive savings. Backed up by FROMM Packaging Australia, rent or purchase options, the P359 delivers for the Australian industry.

All equipment is supported by our on-site mobile service team and spare parts are readily available.

Polyester (PET) Strap

For optimal strapping efficiency we recommend our range of Star Strap-Plus Plastic strap. Talk to our friendly staff today!



← →
19-32mm

7000 N

Friction
Weld


Air

★ Features

- Manual or semi-automatic function
- Fast & reliable
- Simple two button operation
- Robust & durable
- Friction seal joint

+ Benefits

- Excellent off line or production strapping tool
- Pulls great tension
- Ideal for heavy products, ie. steel, timber
- Strong and sturdy
- Long life wear parts
- FROMM 2 year warranty

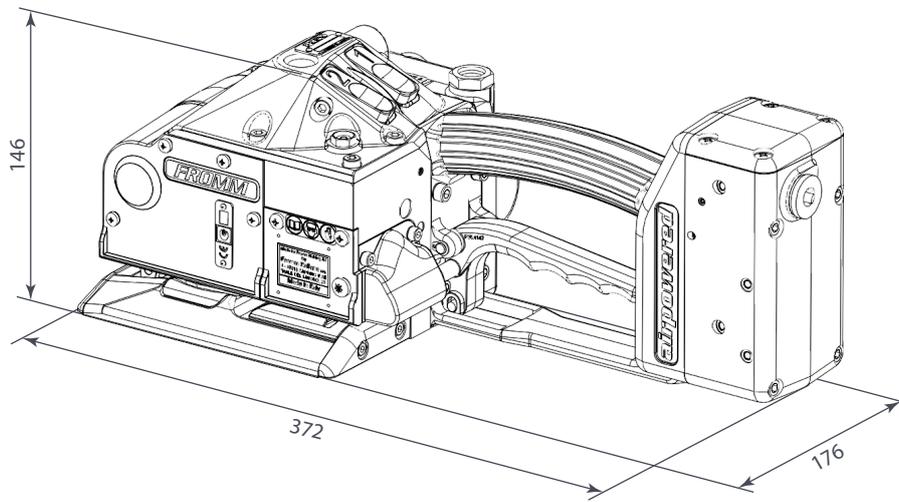

★ Technical Specifications

Tensioning:

Strap Tension (N):	4000-7000
Tensioning Speed (mm/s):	60-120
Joint Strength, approx. (%):	75

Tool Size (without suspension bracket):

Length (mm):	372
Width (mm):	176
Height (mm):	146
Weight (kg):	8.2

Sealing Type:

Friction weld

Strap Specification:

Width (mm):	19-32
Thickness (mm):	0.60-1.53

Power Supply:

Pneumatic power	
Max. Air Pressure (bar):	6.0
Max. PSI:	87

Air Consumption:

Tensioning: 6.5 NI uncompressed air/sec
Sealing: 10.9 NI uncompressed air/sec
Max. pressure drop of 0.5 bar/7.25 psi

Operating Conditions:

Temperature range (°C):	-10 - +45
-------------------------	-----------

FROMM | PACKAGING
AUSTRALIA

Australia Wide

T 1800 023 890

E info@fromm-pack.com.au

W www.fromm-pack.com.au